

# IMAGE PROCESSING FOR WIRE ARC ADDITIVE MANUFACTURING CONTROL AND MONITORING

## Abstract

Additive Manufacturing (AM), often referred to as 3D printing, has revolutionized traditional manufacturing processes by enabling the creation of complex and customized objects layer by layer. Additive Manufacturing (AM), Wire Arc Additive Manufacturing (WAAM), and the significance of image processing in monitoring and controlling WAAM processes. It succinctly highlights the unique characteristics of WAAM, the broader context of AM techniques, and the role of image processing in enhancing the WAAM process. It provides a clear and informative overview of these concepts. The decision between these methods is made based on the materials used, component size, surface polish, and intended uses. The control and monitoring of Wire Arc Additive Manufacturing (WAAM) processes heavily rely on image processing. Image processing approaches improve real-time monitoring, fault detection, and quality control in WAAM by examining visual data collected during the production process. Unlike conventional AM methods that use powdered material, WAAM utilizes a solid wire as the feedstock material. This method involves the controlled deposition of melted wire through an electric arc, leading to the gradual buildup of a three-dimensional object. Monitoring and control in wire arc additive manufacturing (WAAM) involve the application of various techniques to ensure the quality, accuracy, and consistency of the additive manufacturing process using wire-based deposition

**Keywords:** Additive Manufacturing (AM), Wire Arc Additive Manufacturing WAAM

## Authors

### Mr. S M Ghanvat

Mechanical Department  
Sharad Institute of Technology College  
of Engineering  
Yadav, Ichalkaranji, India  
smg@sitcoe.org.in

### Mr. A A Desai

Automation & Robotics Department  
Sharad Institute of Technology College  
of Engineering  
Yadav, Ichalkaranji, India  
ashishdesai@sitcoe.org.in

## I. INTRODUCTION

Layer-by-Layer Fabrication is a fundamental characteristic shared by both Wire Arc Additive Manufacturing (WAAM) and other Additive Manufacturing (AM) techniques. This approach involves building components by adding material layer upon layer, which enables the creation of intricate and complex geometries that are often difficult to achieve using conventional manufacturing methods. This method empowers engineers to design and produce parts with intricate internal structures and unique shapes, revolutionizing traditional manufacturing processes. Furthermore, both WAAM and other AM methods offer a high degree of customization. This means that the manufacturing process can be tailored to produce components that match specific requirements. Designers and engineers have the flexibility to create products that are uniquely suited to their intended applications. This customization capability is a significant advantage over conventional manufacturing, where creating complex, personalized items might be impractical or cost-prohibitive. In essence, the shared principles of layer-by-layer fabrication and customization make both WAAM and other AM techniques valuable tools in modern manufacturing, enabling the production of intricate, tailored components that align precisely with the needs of various industries and applications.

In Wire Arc Additive Manufacturing (WAAM), the feedstock material utilized is a solid wire, predominantly composed of metals. This distinctive feature sets WAAM apart from other Additive Manufacturing (AM) techniques. In contrast, various other AM methods leverage a broader spectrum of materials, encompassing polymers, metals, ceramics, and composites. These materials are available in diverse forms, including powders, liquids, and filaments, contributing to the versatility and adaptability of these techniques. The deposition process in WAAM involves the controlled melting of a solid wire using an electric arc, followed by the layer-by-layer deposition of the molten material. This process's unique utilization of solid wire and electric arc technology contributes to the gradual buildup of intricate three-dimensional objects. On the other hand, different AM techniques adopt varying deposition methods. For instance, Stereolithography utilizes selective curing of liquid resins, Selective Laser Sintering employs lasers or electron beams to fuse powdered materials, and Fused Deposition Modeling extrudes heated filaments. Each method addresses specific material properties and application needs, enabling the creation of diverse components with distinct attributes.

Wire Arc Additive Manufacturing (WAAM) is prominently employed for metals and metal alloys, mainly due to its utilization of solid wire feedstock. This specialization sets WAAM apart in its focus on metallic materials, which are well-suited for various industrial applications. Conversely, other Additive Manufacturing (AM) techniques exhibit greater flexibility by encompassing a broader spectrum of material options. These methods extend their reach to polymers, ceramics, and composite materials, catering to diverse industry needs and allowing for the creation of components with varied material characteristics. Surface finish is a distinctive attribute when comparing WAAM to other AM techniques. WAAM's inherent nature can result in rougher surface finishes due to its process characteristics.

Consequently, additional post-processing steps are often necessary to achieve the desired surface quality. Conversely, other AM techniques possess the capability to attain smoother surface finishes, contingent on the specific technology and material employed. This

versatility in surface quality serves as a key advantage in applications requiring both functional performance and aesthetic appeal.

The differences in material diversity and surface finish between Wire Arc Additive Manufacturing (WAAM) and other Additive Manufacturing techniques contribute to their distinct strengths and applications. WAAM excels in metal-based production due to its wire feedstock, while other AM methods offer versatility by accommodating a wider range of materials. Surface finish attributes underscore the need for post-processing in WAAM, while other AM techniques can achieve varied surface qualities to meet specific requirements.

## II. LITERATURE REVIEW

The concept of "Ease of Use Image Processing for Wire Arc Additive Manufacturing Control and Monitoring" likely pertains to simplifying the utilization of image processing techniques for the purpose of controlling and monitoring the Wire Arc Additive Manufacturing (WAAM) process. Wire Arc Additive Manufacturing (WAAM) is an additive manufacturing technique that employs electric arcs to melt and deposit metal wire to build up objects layer by layer. Process control and monitoring are critical to ensure the quality and consistency of the final product. Image processing, a subset of computer vision, involves the analysis of visual data from cameras and sensors to extract meaningful information. The goal of "Ease of Use Image Processing" is to bridge the gap between complex image analysis techniques and the practical needs of operators and engineers in the WAAM environment. By making image processing more user-friendly, manufacturers can harness the benefits of image-based monitoring and control with reduced training requirements and increased process efficiency.

Dissimilar metal deposition in wire and arc-based additive manufacturing involves the process of fusing two distinct metals, stainless steel and a nickel-based alloy, to create complex structures. This method employs an arc-based technique where a wire electrode is melted, generating a molten pool that solidifies to form layers. This process allows the combination of stainless steel and nickel-based alloy to form intricate and functional components with unique material properties and characteristics. This technique is valuable for applications that require specific material properties in different sections of a single component, offering versatility and performance benefits in various industries.[1]

The "Three-dimensional numerical simulation of arc and metal transport in arc welding based additive manufacturing" involves using computer-based modeling to simulate the complex interactions between the welding arc, molten metal, and the work piece during additive manufacturing processes. This approach employs three-dimensional simulations to understand and optimize the behavior of the welding arc and metal deposition, aiding in the development of more efficient and effective additive manufacturing techniques. These simulations provide insights into the thermal distribution, fluid flow, and solidification processes within the melt pool, contributing to the advancement of arc-based additive manufacturing technologies.[2]

By layering material onto components, Wire Arc Additive Manufacturing (WAAM), a kind of Direct Energy Deposition additive manufacturing, uses the wire welding principles. Due to its low cost and capacity to create huge quantities of parts, this technology has


become very popular in the manufacturing industry. Advances in intelligent applications for smart production systems have been observed at WAAM as industry transition to smart manufacturing systems and enhanced computational resources. These applications cover both real-time process parameter control and manufacturing inspection. The cost-effectiveness of WAAM and its integration with intelligent systems work together to meet the changing needs of contemporary industry. [3]

The paper "Process Monitoring and Control in Wire Arc Additive Manufacturing: A Review" (2018) by Zhang et al. provides an in-depth analysis of process monitoring and control techniques in the context of Wire Arc Additive Manufacturing (WAAM). The authors review the state-of-the-art advancements in monitoring and controlling the WAAM process to enhance its efficiency and quality. The paper discusses various methods such as image processing, sensors, and real-time feedback mechanisms that have been employed to monitor and regulate key parameters during the additive manufacturing process. The review highlights the importance of process stability, material deposition accuracy, and defect detection in achieving optimal WAAM outcomes. The authors also emphasize the role of computational modeling and simulation in predicting and improving process behavior. Overall, the paper underscores the significance of robust monitoring and control strategies in advancing WAAM as a reliable and precise additive manufacturing technique.[4]

The concept of a "layer wise monitoring approach using thermal imaging" involves utilizing thermal imaging technology to detect defects and irregularities during the process of metal deposition, even though the discussion is not exclusively centered around wire arc additive manufacturing (WAAM). This method is relevant and adaptable to WAAM processes as well. By employing thermal imaging, which captures temperature variations, the approach aims to identify potential defects and inconsistencies as each layer of material is deposited, thereby ensuring the quality and integrity of the final product. While the techniques may not be explicitly focused on WAAM, their application can be extended to this additive manufacturing method to enhance defect detection and quality control throughout the layer-by-layer deposition process.[5]

### **III. WIRE AND ARC ADDITIVE MANUFACTURING**

Wire Arc Additive Manufacturing (WAAM) is an advanced manufacturing process that belongs to the broader category of additive manufacturing, also known as 3D printing. WAAM is a method that involves building three-dimensional objects by selectively depositing material layer by layer, using an electric arc as the heat source to melt and fuse metal wire, which is then added to the growing workpiece. It focused on sensor technologies employed in WAAM for process monitoring. It discusses optical, thermal, and acoustic sensors as well as their integration into the additive manufacturing setup. The paper highlights the importance of real-time monitoring to ensure quality[6].

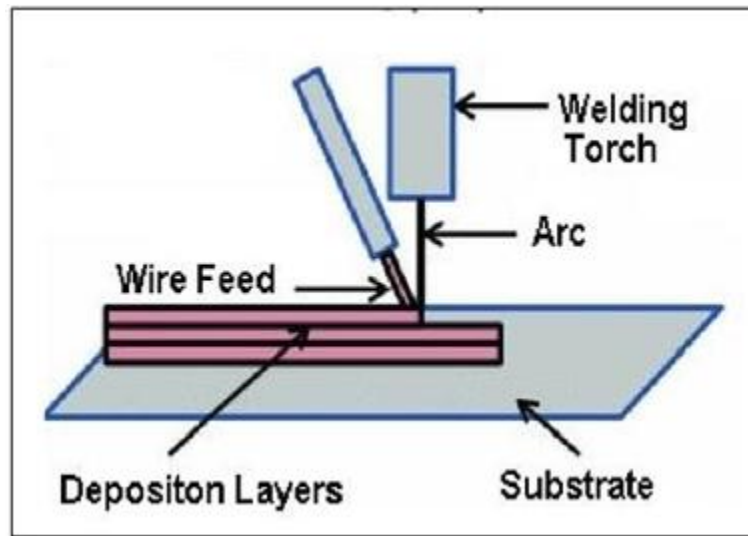

**Figure 1:** Wire and Arc Additive Manufacturing

- **Layer-by-Layer Building:** Similar to other additive manufacturing techniques, WAAM builds objects layer by layer. A computer-controlled system guides the deposition of material to create the desired shape.
- **Metal Wire Feed:** In WAAM, a continuous metal wire is fed into the welding arc. The wire serves as both the heat source and the material to be added to the workpiece.
- **Electric Arc:** An electric arc is generated between the wire electrode and the workpiece. The heat generated by the arc melts the tip of the wire, creating a molten pool on the workpiece.
- **Material Deposition:** As the wire melts, it is deposited onto the workpiece in a controlled manner. The molten material solidifies quickly, forming the current layer of the object.
- **Layer-by-Layer Solidification:** The process is repeated layer by layer until the entire object is built. Each layer bonds to the previous one, creating a fully dense and structurally sound component.

By thoroughly defining these specifications, it provides a clear roadmap for the development and implementation of the image processing system in WAAM control and monitoring. This helps in achieving consistent and reliable results throughout the manufacturing process.

- **Hardware and Software Selection:** Choose appropriate hardware (cameras, sensors) and software tools for image acquisition and processing. The selected equipment should be capable of capturing images with the required level of detail and accuracy for analyzing the WAAM process.

- **Calibration and Standardization:** Calibrate the imaging system regularly to ensure accurate measurements and consistent results. Standardize the imaging setup across different manufacturing scenarios to enable meaningful comparisons and reliable analysis.
- **Real-time Processing:** If real-time monitoring and control are required, ensure that the image processing algorithms are efficient enough to process images in real-time without introducing delays in the manufacturing process.
- **Feature Extraction:** Develop algorithms to extract relevant features from the images. For WAAM, this might involve tracking the size and shape of the melt pool, monitoring the deposition path, or identifying defects like cracks and voids.
- **Data Validation:** Implement validation routines to ensure the accuracy of extracted data. This might involve cross-referencing image data with other process parameters or using redundant imaging systems to confirm results.
- **Data Fusion:** Integrate image data with other process data, such as temperature, voltage, and current, to gain a comprehensive understanding of the WAAM process and its performance.
- **Anomaly Detection:** Develop algorithms to detect anomalies and defects in real-time or during post-processing. This could involve identifying irregular melt pool shapes, inconsistent deposition patterns, or the presence of defects that could compromise the structural integrity of the final product.
- **Adaptation and Optimization:** Continuously improve the image processing algorithms based on feedback from the manufacturing process. Adaptive algorithms can help optimize the WAAM process in response to changing conditions.
- **Validation and Verification** Regularly validate the accuracy and effectiveness of the image processing system against reference standards and known defects. This ensures that the system remains reliable and effective over time.
- **Maintain thorough documentation** of the image processing specifications, methodologies, algorithms, and results. Clear documentation facilitates knowledge transfer, troubleshooting, and compliance with quality standards.

By carefully considering and implementing these steps, you can maintain the integrity of specifications for image processing in wire arc additive manufacturing control and monitoring, leading to improved process control, defect detection, and overall product quality. While not specific to wire arc, layer wise monitoring approach using thermal imaging to detect defects and irregularities during metal deposition. The techniques discussed could be applicable to WAAM as well. [4]

Thermal imaging cameras are employed to capture temperature data from the surface of the workpiece or the deposition area. Different materials and defects can result in variations in temperature distribution.

- **Real-Time Analysis:** As the material is being deposited layer by layer, the thermal imaging system analyzes the temperature patterns in real time. Deviations from expected temperature distributions can indicate defects or irregularities. Certain defects, such as cracks, voids, or incomplete fusion, can cause temperature anomalies. The thermal imaging system identifies these anomalies as potential defects within the layer being deposited [7].
- **Layer Comparison:** By comparing the thermal data of each layer to a reference or ideal temperature distribution, the system can detect inconsistencies that might compromise the structural integrity or quality of the final product. Immediate Feedback: Any detected defects or irregularities trigger alerts or adjustments in real time. The manufacturing process can be paused, modified, or corrected to prevent the propagation of defects to subsequent layers. The thermal imaging data can be stored for each layer, creating a comprehensive record of the manufacturing process and defects detected. This documentation aids in quality assurance, analysis, and process optimization [15].



**Figure 2:** WAAM Processed Components

#### IV. IMAGE PROCESSING TECHNIQUES FOR WIRE ARC ADDITIVE MANUFACTURING(WAAM)

An electric arc is used in the advanced manufacturing method known as "wire arc additive manufacturing" (WAAM) to melt and deposit metal wire in layers, allowing for the construction of complex metal components. For the finished product to be of the highest caliber and integrity, this procedure must be carefully controlled and monitored. It is possible to achieve this control and monitoring through the use of image processing techniques. For WAAM control and monitoring, it is important to properly address the following important image processing techniques:

1. **Thermal Imaging:** Infrared (IR) cameras can record temperature distributions while performing WAAM. These photos may be analyzed using image processing to discover hotspots and track temperature changes. This is essential for identifying problems with

overheating or under heating.

2. **Weld Pool Monitoring:** High-speed cameras may record the behavior of the molten metal pool and analyze it in real time. Analysis of the pool's size, shape, and stability via image processing is possible. Defects in the process can be indicated by variations from the anticipated pool characteristics.
3. **Surface Quality Inspection:** Defect Detection: By examining photographs of the deposited layers, image processing can be utilized to find surface flaws like fractures, porosities, or abnormalities. Algorithms for machine learning can be trained to spot typical flaws.
4. **Geometry Measurement:** Layer Height Measurement: Vision systems may be used to determine the height of each layer that has been deposited. Problems with material deposition can be indicated by variations from the anticipated layer height.
5. **Geometry Reconstruction:** 3D scanning and reconstruction techniques can be used to capture the geometry of the component being manufactured, such as laser scanning or structured light scanning. For a real-time quality assessment, image processing can reconstruct the 3D model and compare it to the desired design.
6. **Monitoring of Smoke and Fumes:** During WAAM, image processing can be used to track the emissions of smoke and fumes. This may provide information on the quality of the welding process and the presence of impurities.
7. **Positioning and Stability:** Alignment Based on Cameras: Cameras can be employed to track the placement and stability of the WAAM system's components. Any tremors or misalignments that can impede the quality of the deposition can be found via image processing.
8. **Color Analysis and Spectroscopy:** Spectroscopic Imaging: The color and spectral properties of the arc and the molten pool can be examined using spectroscopy in conjunction with image processing. Variations in these qualities may be a sign of changes in the material composition.
9. **Data Fusion:** Integration of Sensor Data: To offer a thorough understanding of the WAAM process, image processing should be merged with other sensor data, such as temperature sensors, force sensors, and motion sensors.
10. **Using Machine Learning to Find Anomalies:** To identify patterns linked to defects or process irregularities, train machine learning models. These models have the ability to continuously monitor picture data and, in the event of an anomaly, alert the user or take corrective action.
11. **User Interface:** Create an intuitive user interface that gives engineers and operators access to processed picture data in a format that is easy to understand and use.

It is significant to note that the particular image processing methods and tools



employed will rely on the WAAM system, the materials being utilized, and the quality requirements for the finished result. Therefore, for effective control and monitoring in WAAM, it is crucial to have a complete understanding of the procedure and to work with specialists in image processing and computer vision.

## V. IMAGE PROCESSING COMPONENTS FOR WIRE ARC ADDITIVE MANUFACTURING (WAAM)

To ensure high-quality manufacturing, its control and monitoring need for a comprehensive solution that integrates hardware and software components.

### 1. Hardware Components

- **High-Resolution Cameras and Sensors**
  - Use high-resolution cameras with frame rates suitable for capturing the rapid movements and changes in the WAAM process.
  - Integrate temperature sensors, 3D scanners, and spectroscopic sensors for collecting complementary data.
- **Infrared (IR) Cameras**
  - Incorporate IR cameras to monitor temperature distributions in real-time.
- **Illumination System**
  - Employ specialized lighting to ensure optimal image quality and reduce shadows and glare.
- **3D Scanning Equipment**
  - Utilize 3D scanners for capturing the geometry of the workpiece and the deposited layers.
- **Computer Hardware**
  - Employ powerful computers or embedded systems with GPUs for real-time image processing.

### 2. Software Components

- **Image Acquisition and Preprocessing**
  - Develop software for capturing and preprocessing images from cameras and sensors, including noise reduction and calibration.
- **Real-time Image Processing**

Implement real-time image processing algorithms to analyze the images and sensor data. This includes:

- Weld pool analysis for size, shape, and stability.
  - Surface quality inspection for defect detection.
  - Geometry measurement and reconstruction.
  - Smoke and fume analysis.
  - Color and spectral analysis.
  - Data fusion from multiple sensors.
- **Machine Learning and Anomaly Detection:** Train machine learning models for anomaly detection based on historical data and known defect patterns. These models can continuously analyze the data stream and trigger alerts when anomalies are detected.
  - **Data Logging and Analytics:** Implement data logging and storage capabilities to maintain a record of process data for quality control and analysis.
  - **Feedback Control:** Integrate the image processing system with the WAAM system's control mechanisms to make real-time adjustments based on detected anomalies.
  - **Remote Monitoring and Reporting:** Enable remote access and monitoring of the WAAM process, including the ability to generate reports and alerts via email or mobile notifications.

Collaboration between experts in image processing, computer vision, and WAAM is crucial for the successful development and implementation of this solution. Regular maintenance and updates are also essential to keep the system performing at its best and ensuring the production of high-quality WAAM components.

## VI. APPROACHES FOR ENHANCING THE WAAM PROCESSES' PERFORMANCE

1. **Process Improvement:** To provide the best possible consistency and quality of the deposition, adjust process variables including the arc voltage, wire feed rate, and travel speed. To study and improve the process for less distortion, residual stress, and porosity, use computer simulations.
2. **Material Options:** To assure the appropriate mechanical and metallurgical qualities, choose high-quality feedstock materials with well-known features and certificates. Verify the compatibility of the components to avoid melting, mixing, and intermetallic formation problems.
3. **Processing Prior to and Afterward:** To relieve residual stresses and enhance material qualities, implement appropriate pre-weld and post-weld heat treatments. To eliminate flaws, reduce surface roughness, and guarantee precise measurements, perform machining or surface finishing.

- 4. Layer-by-Layer Investigation:** Examine each layer for flaws and inconsistencies using non-destructive testing (NDT) techniques including ultrasonic testing, X-rays, or computed tomography. Utilize visual inspection or thermal imaging methods to look for irregularities while the material is being deposited.

Designers may significantly enhance the quality, dependability, and efficiency of the components made using additive manufacturing by combining these techniques and customizing them to the demands of the WAAM process.

## VII. RELATION FACTOR WITH EQUATIONS FOR WAAM MANUFACTURING

It seems like you're looking for equations or factors related to Wire Arc Additive Manufacturing (WAAM) manufacturing processes. While I can provide some general factors and concepts related to WAAM, keep in mind that the equations and specific factors can vary based on the particular application, materials used, and process parameters. Here are some relevant factors and equations that might be of interest:

- 1. Deposition Rate (D):** The rate at which material is deposited during the WAAM process. Equation:  $D = v \times w$ , where  $v$  is the travel speed and  $w$  is the deposition width. The "Deposition Rate" in the context of Wire Arc Additive Manufacturing (WAAM) refers to the speed at which material is added to the work piece during the additive manufacturing process. This rate is a critical factor influencing the efficiency and productivity of the manufacturing process. The equation that defines the deposition rate is  $D = v \times w$ , where " $v$ " represents the travel speed of the welding head, and " $w$ " represents the deposition width of the material being added. This equation reflects the fundamental relationship between the movement speed of the welding head and the amount of material being deposited. By controlling the travel speed and deposition width, manufacturers can adjust the deposition rate to achieve the desired outcome in terms of build speed, material utilization, and overall part quality[14].
- 2. Heat Input (Q):** The amount of energy transferred to the workpiece during welding. Equation:  $Q = V \times I \times t$ , where  $V$  is the voltage,  $I$  is the current, and  $t$  is the time. "Deposition Rate (D)" and "Heat Input (Q)" are two essential factors in the Wire Arc Additive Manufacturing (WAAM) process that significantly impact the quality and characteristics of the manufactured components.

Deposition Rate refers to the speed at which material is added to the workpiece during the WAAM process. It plays a vital role in determining the build time, material utilization, and the overall efficiency of the manufacturing process. The equation for Deposition Rate is  $D = v \times w$ , where " $v$ " represents the travel speed of the welding head, and " $w$ " represents the deposition width of the material being added. This equation illustrates how the combination of travel speed and deposition width affects the amount of material deposited per unit of time.

Heat Input refers to the amount of energy that is transferred to the workpiece during the welding process. It plays a crucial role in controlling the thermal characteristics of the melt pool and the surrounding material. The equation for Heat Input is  $Q = V \times I \times t$ , where " $V$ " represents the voltage applied to the welding arc, " $I$ " represents the current

flowing through the arc, and "t" represents the time during which the welding process occurs. This equation quantifies the energy input into the system, which affects the temperature distribution, cooling rate, and solidification behavior of the deposited material[13].

### Implications

- **Thermal Behavior:** Heat Input directly impacts the thermal behavior of the melt pool. Proper heat input control is crucial for controlling the size and shape of the melt pool, which affects layer bonding, residual stresses, and distortion.
- **Microstructure:** Heat Input influences cooling rates, affecting the microstructure of the deposited material. Rapid cooling can lead to finer grains, impacting mechanical properties such as strength and toughness.
- **Residual Stresses:** Heat Input influences residual stresses formed during the cooling process. Controlling heat input can mitigate the extent of residual stresses, enhancing component stability.
- **Solidification Behavior:** Heat Input influences the solidification rate, affecting the formation of defects such as porosity and cracks. Proper heat input management contributes to minimizing these issues.
- **Efficiency and Throughput:** Proper control of Heat Input ensures efficient energy usage, which is crucial for cost-effective production and reduced thermal distortion.

Balancing Deposition Rate and Heat Input is vital to achieving consistent part quality and desired material characteristics in WAAM. By understanding and optimizing these factors, manufacturers can enhance the reliability, efficiency, and performance of additively manufactured components.

Together, Deposition Rate and Heat Input impact the material's microstructure, mechanical properties, and overall quality of the additively manufactured components. Balancing these factors is essential to achieve the desired build speed, structural integrity, and part performance in WAAM processes. Proper control and optimization of these parameters contribute to producing components with consistent and reliable properties[12].

3. **Melt Pool Geometry:** The shape and dimensions of the molten pool during deposition. Equation (for cylindrical melt pool):  $V_{\text{melt}} = \pi \times (d/2)^2 \times h$ , where d is the melt pool diameter and h is the depth. "Melt Pool Geometry" refers to the characteristics of the molten pool that forms when material is deposited during an additive manufacturing process, such as Wire Arc Additive Manufacturing (WAAM). The shape and dimensions of the melt pool play a crucial role in determining the final quality and properties of the manufactured component.

Equation for Melt Pool Geometry (Cylindrical): The equation  $V_{\text{melt}} = \pi \times (d/2)^2 \times h$  quantifies the volume of the melt pool, where:

"V<sub>melt</sub>" is the volume of the molten material, "d" is the diameter of the melt pool, and "h" is the depth or height of the melt pool.

**4. Cooling Rate (CR):** The rate at which the molten material solidifies and cools down.

Equation:  $CR = \Delta T / \Delta t$ , where  $\Delta T$  is the temperature change and  $\Delta t$  is the time interval. There are a number of elements that affect the cooling rate in WAAM, including:

- **Deposition Rate:** As more material is added quickly, a higher deposition rate might result in quicker cooling rates.
- **Heat Input:** The temperature of the melt pool is influenced by the amount of energy used throughout the process. Slower cooling rates may be the result of more heat input.
- **Material Conductivity:** The thermal conductivities of various materials vary, which has an impact on how rapidly heat is removed from the melt pool.
- **Part Geometry:** The dimensions and shape of the part can affect cooling rates by affecting the way heat is dispersed.
- **Layer Thickness:** Because there is more material and heat involved, thicker layers may cool more slowly.

**5. Thermal Gradient (G):** The change in temperature per unit distance.

Equation:  $G = \Delta T / \Delta x$ , where  $\Delta T$  is the temperature change and  $\Delta x$  is the distance.

**6. Solidification Rate:** The rate at which the molten material solidifies.

Equation: Solidification Rate = Volume solidified / Time.

- To control the solidification rate during the WAAM process, manufacturers can adjust several factors, including heat input, deposition rate, and part geometry. Achieving the right balance between these parameters ensures that solidification occurs at a controlled rate, leading to the desired material properties and part quality.
- **Microstructure:** The solidification rate affects the size and distribution of grains within the material. A slower solidification rate can lead to larger grains, while a faster rate can result in finer microstructures.
- **Mechanical Properties:** The microstructure influenced by the solidification rate directly impacts the material's mechanical properties, such as strength, toughness, and ductility.
- **Defect Formation:** Proper solidification rates can help prevent defects like porosity and cracking by allowing for controlled material solidification.
- **Residual Stresses:** The rate of solidification influences how residual stresses develop in the material during cooling. Managing these stresses is important for part stability and performance.

- **Cooling Control:** Managing the solidification rate can help control the cooling rate, which is important for achieving uniform microstructures and properties throughout the part.

**7. Residual Stress ( $\sigma$ ):** The internal stresses that remain in a material after cooling.

Equation:  $\sigma = E \times \alpha \times \Delta T$ , where  $E$  is the elastic modulus,  $\alpha$  is the coefficient of thermal expansion, and  $\Delta T$  is the temperature change.

In this Equation:

" $\sigma$ " represents the residual stress in the material.

" $E$ " is the elastic modulus of the material, which characterizes its stiffness.

" $\alpha$ " is the coefficient of thermal expansion, which measures how much the material expands or contracts when its temperature changes.

" $\Delta T$ " is the temperature change experienced by the material during the cooling process.

Rigorous process planning, optimization, and post-processing are required for controlling and reducing residual stresses in WAAM.

- **Heat Treatment:** For better part integrity, controlled heat treatments can assist redistribute residual stresses and relieve them.
- **Implementing progressive cooling techniques:** It can assist prevent the development of abrupt thermal gradients and decrease the accumulation of residual stress.
- **Process Parameters:** The rate and distribution of residual stress production can be affected by changing parameters including heat input, travel speed, and layer thickness.
- **Simulation:** Computer simulations can simulate and forecast the development of residual stresses, which benefits process improvement.
- **Design of the Part:** Design factors, such as part geometry and build orientation, can affect how residual stresses are distributed.

Making high-quality components with WAAM necessitates balancing the demand for suitable material characteristics and dimensional accuracy while limiting harmful residual stresses.

**8. Weld Penetration Depth ( $d_p$ ):** The depth to which the welding arc penetrates the workpiece.

Equation:  $d_p = K \times I \times t / v$ , where  $K$  is a constant,  $I$  is the current,  $t$  is the time, and  $v$  is the travel speed.

In this equation:

" $d_p$ " represents the depth of penetration of the welding arc.

" $K$ " is a constant that accounts for various factors influencing penetration.

" $I$ " is the current flowing through the welding arc.

"t" is the time during which the welding process occurs. "v" is the travel speed of the welding head

**9. Deposition Efficiency (DE):** The ratio of deposited material to the total material fed.

Equation:  $DE = (\text{Deposited Mass} / \text{Fed Mass}) \times 100\%$ .

In order to control the weld penetration depth in WAAM, process parameters must be adjusted to reach the required depth while retaining other crucial elements:

Controlling the Weld Penetration Depth in WAAM involves adjusting process parameters to achieve the desired depth while maintaining other critical factors:

- **Current and Voltage:** Proper welding current and voltage settings have an impact on the energy input into the process, which in turn has an impact on penetration depth.
- **Travel Speed:** Changing the travel speed affects how much heat is applied and how much material melts, which affects penetration.
- **Heat Input:** The amount of material that melts and, as a result, the penetration depth are both influenced by the welding arc's heat input.
- The depth to which the arc penetrates a material depends on its conductivity, thermal qualities, and melting characteristics.
- **Part Geometry:** The thickness of the workpiece material and its shape both affect how far the welding arc can go.

**10. Layer Height (h<sub>layer</sub>):** The thickness of each deposited layer.

Equation:  $h_{\text{layer}} = D \times (1 - \text{Overlap})$ , where D is the deposition width and Overlap is the overlapping factor.

In Wire Arc Additive Manufacturing (WAAM), "Layer Height" (h<sub>layer</sub>) refers to the vertical thickness of each individual layer that is deposited throughout the additive manufacturing process. The overall build quality, part correctness, and mechanical qualities of the components produced by additive manufacturing are greatly influenced by the layer height [11].

In this equation:

"h<sub>layer</sub>" represents the height of each deposited layer.

"D" is the deposition width, which is the horizontal distance covered by the welding arc during material deposition.

"Overlap" is the overlapping factor, which represents the extent to which successive layers overlap each other. These are just a few examples of equations and factors that can be relevant to WAAM manufacturing. The specific equations and factors used in WAAM can vary based on the process setup, materials, and desired outcomes. It's important to consult literature and resources specific to your application to get accurate equations and factors tailored to your needs.

**11. Relevance to WAAM:** A crucial parameter that affects several facets of additive manufacturing is layer height in WAAM:

- **Build Accuracy:** The final component's vertical resolution is determined by the layer height. Finer features and better surface polish result from a lower layer height.
- **Mechanical Properties:** The layer height can have an impact on the part's strength and resistance to fatigue.
- **Process Parameters:** Altering the feed rate, heat input, and travel speed can change the layer height.

For the WAAM process to produce accurate, high-quality, and functionally reliable components, layer height must be balanced with other process variables.

## VIII. IMAGE PROCESSING TO MEET WAAM SPECIFICATIONS

Image processing for Wire Arc Additive Manufacturing (WAAM) involves using digital image analysis techniques to capture, process, and analyze images related to the manufacturing process. This can include images of the molten pool, deposited layers, and other aspects of the WAAM process[10]. Image processing is crucial in WAAM for several reasons:

1. **Process Monitoring and Control:** Image processing allows real-time monitoring of the additive manufacturing process. By analyzing images, operators can detect anomalies, defects, and deviations from the desired parameters. This enables timely adjustments to prevent or mitigate issues during the build, enhancing the overall quality of the manufactured parts.
2. **Defect Detection:** Image processing techniques can identify defects such as porosity, cracks, lack of fusion, and irregularities in deposited layers. Detecting these issues early on allows for corrective actions to be taken before they impact the final part quality.
3. **Quality Assurance:** Through image analysis, manufacturers can ensure that the deposited layers conform to specifications. This is crucial for meeting quality standards and maintaining consistent part quality across different manufacturing runs.
4. **Layer Registration and Alignment:** Image processing can be used to align and register each successive layer accurately. This is vital for achieving dimensional accuracy and preventing cumulative errors that might occur if layers are misaligned.
5. **In-Process Feedback:** Real-time image analysis provides feedback on the quality of the current layer being deposited. This can enable adaptive control systems to adjust process parameters dynamically, optimizing the build quality.
6. **Process Optimization:** By analyzing images of the molten pool and deposition process, manufacturers can identify opportunities for process optimization. This includes adjusting parameters to achieve desired outcomes more efficiently.



7. **Research and Development:** Image processing allows researchers to gain insights into the behavior of the molten pool, material flow, and thermal characteristics. This information can lead to advancements in WAAM process understanding and optimization.
8. **Documentation and Traceability:** Capturing images throughout the WAAM process provides a visual record of the manufacturing steps. This documentation is valuable for traceability, analysis, and quality audits.
9. **Automation and Industry 4.0:** Integrating image processing into WAAM contributes to the advancement of smart manufacturing. Automated systems can use image analysis to make real-time decisions, reducing the need for manual intervention.

In summary, image processing is essential to contemporary manufacturing techniques like WAAM. It improves process oversight, defect identification, and quality control, which eventually results in better part quality, less waste, and greater effectiveness. Image processing will become more crucial as the manufacturing sector adopts automation and data-driven decision-making in order to produce high-quality additively made components[8].

## IX. APPLICATIONS FOR WAAM

Wire Arc Additive Manufacturing (WAAM) has a wide range of applications across various industries due to its unique capabilities and advantages. Some notable applications of WAAM include:

1. **Aerospace Industry:** WAAM is used to manufacture aerospace components such as engine parts, airframe structures, and landing gear components. Its ability to create large-scale, complex, and customized parts makes it well-suited for the aerospace sector.
2. **Automotive Industry:** WAAM is employed in the automotive sector to fabricate components like engine blocks, transmission parts, and chassis components. The technology's cost-effectiveness and potential for lightweight design contribute to its adoption in this industry.
3. **Oil and Gas Industry:** WAAM is utilized to create parts for oil rigs, pipelines, and other equipment used in the oil and gas sector. The ability to manufacture large and corrosion-resistant components is particularly beneficial in harsh operating environments.
4. **Marine Industry:** WAAM finds application in the marine industry for manufacturing ship components, propellers, and offshore structures. Its ability to create parts with excellent mechanical properties and resistance to corrosion is valuable in marine applications.
5. **Energy Industry:** In the energy sector, WAAM is used to create components for power generation and distribution, including turbine blades, generator parts, and heat exchangers. The technology's flexibility and potential for rapid prototyping are advantageous in this field.

6. **Tooling and Molds:** WAAM is employed to fabricate tooling, molds, and dies used in various manufacturing processes. The technology's ability to create complex shapes and customization is beneficial for producing specialized tooling.
7. **Research and Prototyping:** WAAM is utilized for research purposes and rapid prototyping of new designs. It allows researchers and engineers to quickly produce prototypes for testing and validation before moving to full-scale production.
8. **Repair and Maintenance:** WAAM is used for repairing damaged or worn-out components, particularly in industries where large and expensive parts are involved. It can extend the lifespan of critical equipment and reduce downtime.
9. **Customized and Low-Volume Production:** WAAM is suitable for producing customized and low-volume components that may not be feasible using traditional manufacturing methods. It enables cost-effective production of small batches with specific geometries.
10. **Defense and Military Applications:** WAAM is utilized in the defense sector for producing components such as military vehicles, armored vehicles, and other specialized equipment.

Overall, WAAM offers the capability to create large, intricate, and functional metal components with reduced material waste and lead times. Its versatility, cost-effectiveness, and potential for customization make it a valuable technology in various industries seeking innovative manufacturing solutions.

## X. COST WITH WAAM PROCESS

The cost of Wire Arc Additive Manufacturing (WAAM) involves multiple factors, including equipment, materials, labor, energy consumption, post-processing, and more. The specific cost breakdown can vary based on factors such as the complexity of the parts being produced, the size of the components, the chosen materials, and the level of automation in the process[9]. Here's a general overview of cost considerations for WAAM:

1. **Equipment Costs:** WAAM requires specialized equipment, including welding machines, robotic systems, and wire feeders. The cost of this equipment can vary significantly based on the manufacturer, capacity, and features.
2. **Material Costs:** The cost of the metal wire used for deposition is a significant factor. Material selection can impact the overall cost, as different metals have varying prices.
3. **Labor Costs:** Skilled operators and technicians are needed to set up, monitor, and maintain the WAAM process. Labor costs include programming, process control, and quality assurance.
4. **Energy Consumption:** The energy required for welding and powering the equipment contributes to the overall cost. Energy efficiency measures can help mitigate this expense.

5. **Post-Processing:** Depending on the application, post-processing steps such as machining, surface finishing, and heat treatment might be necessary. These steps add to the total cost.
6. **Overhead Costs:** Overhead costs include facility expenses, maintenance, insurance, and administrative costs associated with running the WAAM operation.
7. **Maintenance and Repairs:** Regular maintenance and occasional repairs of equipment can add to operational costs.
8. **Consumables:** Consumables such as welding electrodes, shielding gas, and other auxiliary materials contribute to the ongoing cost of production.
9. **Waste and Material Utilization:** Material waste generated during the deposition process can impact material costs. Efficient use of materials and minimizing waste are essential for cost control.
10. **Automation and Efficiency:** High levels of automation and process optimization can reduce labor and energy costs over time.
11. **Customization and Complexity:** The complexity of the parts and the level of customization required can impact the time and resources needed for programming and production.

It's important to conduct a comprehensive cost analysis specific to your manufacturing scenario to accurately determine the cost of WAAM. The benefits of WAAM, such as reduced material waste, faster production, and the ability to produce complex geometries, should also be considered when evaluating its cost-effectiveness compared to traditional manufacturing methods.

## XI. CONCLUSION AND FUTURE SCOPE

In conclusion, image processing has emerged as a transformative tool in the realm of Wire Arc Additive Manufacturing (WAAM), revolutionizing the way manufacturers monitor, control, and optimize the additive manufacturing process. By harnessing digital image analysis techniques, WAAM practitioners can gain insights into the intricacies of the molten pool behavior, layer deposition, and overall process dynamics. This technology brings a multitude of advantages to the forefront:

1. **Enhanced Process Monitoring:** Image processing provides real-time visibility into the additive manufacturing process, allowing operators to identify deviations, defects, and irregularities as they occur. This immediate feedback empowers swift interventions, ensuring that potential issues are nipped in the bud.
2. **Defect Detection and Quality Assurance:** With image analysis, even the minutest defects such as porosity, cracks, and lack of fusion can be pinpointed. This meticulous defect detection enhances the quality of the final product and safeguards against the delivery of subpar components.

- 3. Adaptive Control and Optimization:** Leveraging the insights gained from image processing, manufacturers can implement adaptive control systems that dynamically adjust process parameters. This optimization leads to efficient material usage, reduced waste, and enhanced part quality.
- 4. Process Understanding and Research:** Image processing enables researchers to delve into the intricacies of the molten pool's behavior, material flow, and thermal interactions. This comprehension paves the way for refining process parameters, exploring new materials, and advancing the entire WAAM technology.
- 5. Documentation and Traceability:** Capturing and analyzing images throughout the WAAM process provides a robust visual record that aids in traceability, process validation, and compliance with quality standards.
- 6. Automation and Industry 4.0 Integration:** Image processing aligns seamlessly with the principles of Industry 4.0 by automating decision-making processes based on real-time image analysis. This convergence drives forward the march toward smart manufacturing. In a technology landscape characterized by rapid advancements, image processing for WAAM stands as a bridge between traditional manufacturing and the future of production. Its ability to harness the power of visual information propels additive manufacturing to new heights of precision, quality, and efficiency. As manufacturers continue to embrace the potential of image processing, the boundaries of what can be achieved with WAAM are being redefined, ultimately reshaping the way we conceptualize and execute modern manufacturing processes.

## REFERENCES

- [1] Takeyuki Abe —Dissimilar metal deposition with a stainless steel and nickel-based alloy using wire and arc-based additive manufacturing, *Precision Engineering*, Volume 45, 2016, Pages 387-395, ISSN 0141-6359, <https://doi.org/10.1016/j.precisioneng.2016.03.016>.
- [2] Xiangman Zhou, Haiou Zhang, Guilan Wang, Xingwang Bai, Three-dimensional numerical simulation of arc and metal transport in arc welding based additive manufacturing, *International Journal of Heat and Mass Transfer*, Volume 103, 2016, Pages 521-537, ISSN 0017-9310
- [3] P. Rangaswamy, M.L. Griffith, M.B. Prime, T.M. Holden, R.B. Rogge, J.M. Edwards, R.J. Sebring, Residual stresses in LENS® components using neutron diffraction and contour method, *Materials Science and Engineering: A*, Volume 399, Issues 1–2, 2005, Pages 72-83, ISSN 0921-5093, <https://doi.org/10.1016/j.msea.2005.02.019>.
- [4] Chunyang Xia, Zengxi Pan, Joseph Polden, Huijun Li, Yanling Xu, Shanben Chen, Yuming Zhang, A review on wire arc additive manufacturing: Monitoring, control and a framework of automated system, *Journal of Manufacturing Systems*, Volume 57, 2020, Pages 31-45,
- [5] ISSN 0278-6125, <https://doi.org/10.1016/j.jmsy.2020.08.008>.
- [6] Ding D, et al. Wire-feed additive manufacturing of metal components: technologies, developments and future interests. *Int J AdvManufTechnol* 2015;81(1–4):465–81.
- [7] Harris ID, Director A. Development and implementation of metals additive manufacturing. New Orleans: DOT International; 2011.
- [8] Wu B, et al. A review of the wire arc additive manufacturing of metals: properties, defects and quality improvement. *J Manuf Process* 2018;35:127–39.
- [9] Bourell DL, Leu MC, Rosen DW. Roadmap for additive manufacturing: identifying the future of freeform processing. Austin, TX: The University of Texas at Austin; 2009. p. 11–5.
- [10] Ding D, et al. Towards an automated robotic arc-welding-based additive manufacturing system from CAD to finished part. *Comput Des* 2016;73:66–75.
- [11] Nagesh D, Datta G. Genetic algorithm for optimization of welding variables for height to width ratio and application of ANN for prediction of bead geometry for TIG welding process. *Appl Soft Comput*

- 2010;10(3):897–907.
- [12] Haleem A, Javaid M. Additive manufacturing applications in industry 4.0: a review. *J IndIntegrManag* 2019;4(04):1930001.
  - [13] Dilberoglu UM, et al. The role of additive manufacturing in the era of industry 4.0. *ProcediaManuf* 2017;11:545– 54.
  - [14] Rieder H, et al. Online monitoring of additive manufacturing processes using ultrasound. 11th European Conference on Non-Destructive Testing (ECNDT). 2014.
  - [15] Pan Z, et al. Arc welding processes for additive manufacturing: a review. *Transactions on intelligent welding manufacturing*. Springer; 2018. p. 3–24.
  - [16] Chen B, Chen S. A study on applications of multi-sensor information fusion in pulsed-GTAW. *Robotic welding, intelligence and automation*. Springer; 2011. p. 245–52.