

MODELLING OF THE PARTICLE MIXING IN SEAD COATER USING DEM SOFTWARE

VALLE NAVYA

Department of processing and food engineering
College of Agricultural engineering kandhi, sangareddy.
Telangana, India
Vallenavya1999@gmail.com

GATTU SRIHARIKA

Department of processing and food engineering
College of Agricultural Engineering kandhi, sangareddy.
Telangana, India

ABSTRACT

In numerous industrial applications like seed and tablet coating, there is significant interest in coating particulate solids with a thin film layer. Seed processing commonly involves applying a protective coating to seeds using fertilizers, and disease-control agents like pesticides and fungicides. This process is often carried out using batch coaters, typically comprised of a cylindrical drum rotating horizontally. The coating material is fed into the drum simultaneously with the seeds driven around it by the horizontal rotation. Three baffles, positioned on either side of the drum, help to mix the seeds during the coating process. This study focuses on modeling the seed coating process using the Distinct Element Method (DEM) simulations. Groundnut seeds are used as the model material, and their shape and size are approximated as clumped spheres in the DEM. The DEM coating model predicts the velocity of the seeds as they are projected tangentially from an opening in the drum. The seed velocity is measured using high-speed video imaging and incorporated into the DEM simulations to validate the results. In the simulations, the velocity of seeds is represented using different colors. The study evaluates the distribution of seeds and their coefficient of variation under various process conditions, such as the rotational speed of the drum, baffle arrangement, and designs. The findings indicate that the speed of the drum, the angle of the baffles, and the clearance to the wall have the most significant impact on the process, while the baffle width and curvature have only a minimal effect.

I. INTRODUCTION

In agriculture and horticulture, seed priming or seed coating encompasses the application of chemical agents, often with antimicrobial or fungicidal properties, onto seeds before sowing. In some cases, insecticides are also used, though less frequently. Seed treatments offer an environmentally friendly way to use pesticides, as only small amounts are required. To discourage birds from consuming treated seeds and facilitate easy visibility and cleanup in case of accidental spills, colorants are often added to the treatment. The application of these chemicals to the seeds requires specialized machinery to ensure safe and efficient handling. A seed coating, on the other hand, is a thicker covering for seeds that may contain fertilizers, growth promoters, seed treatments, an inert carrier, and a polymer outer shell. Additionally, the term "seed dressing" is used to describe the process of removing chaff, weed seeds, and straw from seed stocks.

The application of a thin film layer to particulate solids is extensively employed in diverse industrial sectors, notably in seed coating processes. For seed processing, rotary drum batch coaters are the primary choice for applying a protective layer comprising fertilizers and crop protection materials onto the seeds. The quality of the final product is directly influenced by the drum's speed, which impacts the velocity, motion, and mixing of the seeds. The drum speed and design are crucial factors under the direct control of the process operation, ultimately affecting the overall effectiveness of the coating process.

Dust arising from treated seeds has been known to cause certain issues, especially when crops like maize are planted during the main honey flows. In response to this problem, improvements have been made to pneumatic drills to minimize dust release, and advancements in seed treatment compounds have been introduced in Europe, with Germany and the Netherlands taking the lead between 2009 and 2012. These developments aimed to prevent the compounds from breaking up into dust during planting. Detailed information regarding seed treatments, including the aforementioned improvements, can be found on registration authority databases [7]. For farmers seeking the United States Department of Agriculture Organic certification, it is a requirement to use organic seed. If organic seed is not available, farmers are permitted to use conventional, untreated seed. However, the use of treated seeds is strictly prohibited for organic certification [8].

II. MATERIALS AND METHODOLOGY

A. Ground Nut

Groundnut, classified under the genus *Arachis* in the subtribe *Stylosanthinae* of the tribe *Aeschynomeneae* in the family *Leguminosae*, is a self-pollinated tropical annual legume. It holds significant importance as one of the most crucial cash crops in our country. Despite its low cost, groundnut is a highly valuable source of essential nutrients. Globally, it ranks as the sixth most important oilseed crop. With oil content ranging from 48% to 50% and protein content ranging from 26% to 28%, groundnut serves as a rich reservoir of dietary fiber, minerals, and vitamins. Groundnut is cultivated worldwide, covering an extensive area of 26.4 million hectares, with a total production of 37.1 million metric tonnes and an average productivity of 1.4 metric tonnes per hectare. This crop is grown

in over 100 countries across the globe. Remarkably, developing countries dominate its cultivation, accounting for 97% of the global groundnut area and 94% of its total production. Peanut, as the predominant oilseed crop in India, holds the leading position in terms of production volume. It contributed to 35.99 percent of the nation's total oilseed output during the 2007-08 period. On average, peanuts comprise approximately 40.10 percent fat and 25.30 percent protein, constituting a substantial reservoir of calcium, iron, and the vitamin 'B' complex encompassing thiamine, riboflavin, niacin, and vitamin 'A'. With its diverse range of applications, peanut exhibits multifaceted utility.

Seed Drum Description

The seed treatment drum comprises a frame, handle, and a cylindrical drum, which is mounted on a tripod-angle iron frame. To ensure uniform mixing, three pieces of mild steel flat are welded inside the drum. Before commencing the chemical mixing, workers are advised to wear plastic hand gloves and nose masks for their health protection. Once the chemicals are added to the drum, a small amount of water is introduced, and the drum's lid is tightly closed. The drum is then rotated for approximately 20 to 25 revolutions. After completing the process, which takes around 1-2 minutes, the lid is opened, and the treated seeds are transferred to a separate bag or container. The entire operation for a 20kg seed batch typically takes about 5-6 minutes to complete.



Fig .1 Seed coating Drum

B. Physical properties

Bulk density

bulk density is defined as the ratio of the mass of the ground nut seeds to its total volume. It was determined by filling a measuring cylinder of known volume with groundnut seeds without compaction.

$$\text{Bulk density } (\rho_b) = \frac{\text{mass of the groundnut seeds,kg}}{\text{volume of the container,m}^3}$$

True density

The true density (ρ_t) is the ratio of the mass of the ground nut to its true volume. It was determined using the toluene displacement method. Toluene (C_7H_8) was used in place of water because ground nut absorbed toluene to a lesser extent. (Ravi *et al.* 2015).

Porosity

Porosity is defined as a measure of voids or space of the volume within the substance that occupied the total volume. The symbol used for porosity is ' θ ' and is calculated by using the relationship between bulk density and true density (Muralidhar *et al.* 2012).

Angle of repose

The angle of repose (θ) is considered as the angle in degrees with the horizontal at which the material will stand forming a heap. The angle of repose was calculated from the measurement of the height of the heap at the center and the base diameter of the heap (Chidanand *et al.* 2015).

$$\theta = \tan^{-1}\left(\frac{2h}{d}\right)$$

Where,

h - Height of the pile or heap, m

d - diameter of the pile or heap, m

D. Dem Introduction

The discrete element analysis (DEA), alternatively known as the distinct element analysis, pertains to a cluster of computational approaches employed to calculate the movement and impact of numerous diminutive entities. While DEA maintains a strong kinship with molecular dynamics, its distinguishing factor lies in the incorporation of rotational degrees of liberty, coupled with stateful interactions and intricate geometries (comprising polyhedral forms). Thanks to strides in computational potency and numerical algorithms for proximate-neighbor arrangement, it has now become feasible to computationally simulate millions of entities on a solitary processing unit. Presently, DEA is gaining widespread recognition as an efficacious technique for tackling engineering predicaments encompassing granular and discontinuous materials, particularly within domains like granular flows and powder mechanics.

III. Results And Discussion

This chapter deals with the results obtained from the various tests conducted during the experiments.

E. Bulk density (ρ_b):

The bulk density was calculated with a known volume of the container. The average of three replications is 648.06kg/m^3 .

F. angle of repose:

The angle of the pile was measured at eight different positions and the experiment was repeated four times. The angle of repose ranged between 26.1° and 25.2° with an average value of 25.4° (Fig.2)



Fig .2. Angle of repose test of groundnuts.

G. velocity of the groundnut particles simulated with DEM:

The drum was given a rotational motion in the DEM and velocity profiles formed during the simulation were studied. The velocity of the simulated particles varied between 0.2 and 2.5 m/s. the results showed that initially the velocity constantly increased until 0.23 s and stabilized afterward with minor fluctuations as shown in Fig. 3 average velocities at different time steps showed a steady increase with time. However, it should be observed that the average.

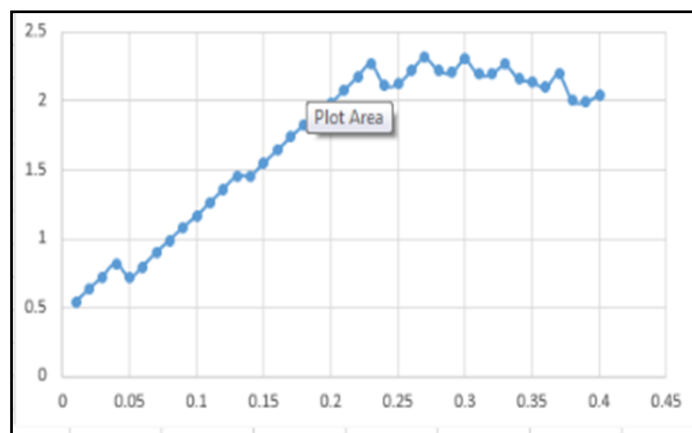


Fig.3 Variation of the maximum velocity of the particles with simulation time

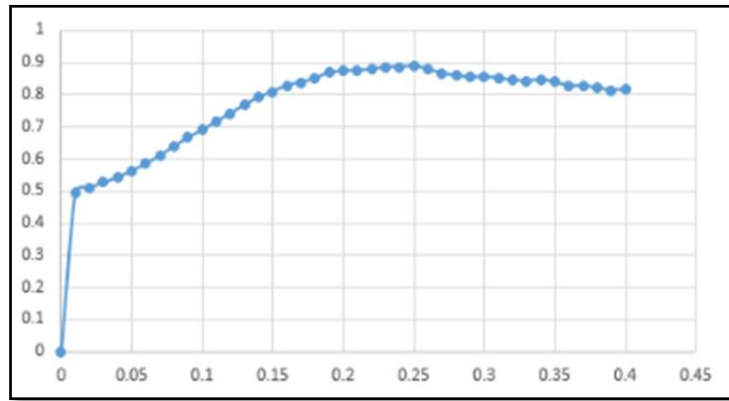


Fig. 4 Variation of the average velocity of the particles with simulation time

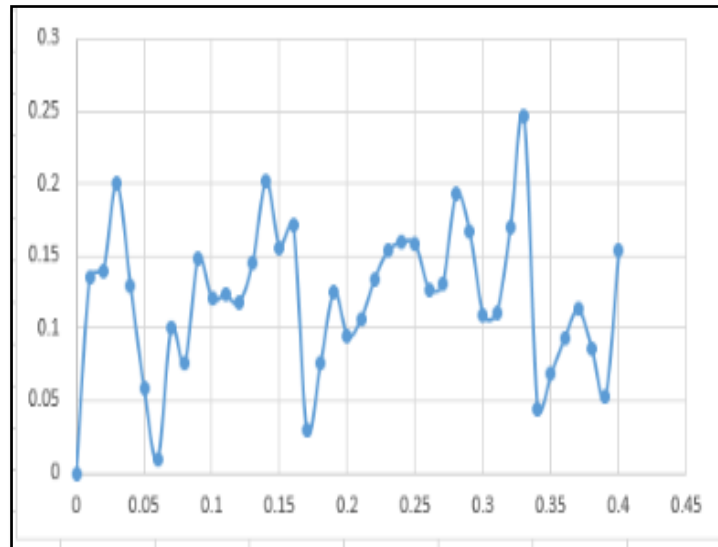


Fig .5 Variation of the minimum velocity of the particles with simulation

IV. CONCLUSION

The effect of various process parameters on the velocity variability of groundnut seeds in a batch seed coater Was investigated using DEM simulations. In the DEM model, the seeds were represented by small spheres. Once brought into contact with a drum surface, the velocity of the seed was stored in the Memory as the max, min, and average velocity. And it was removed from the simulation. The uniformity of coating was then assessed based on the coefficient of variation of the coating mass on each seed. It was shown that using this model the velocity of the seed at different time intervals has obtained hence giving helpful information about the maximum, minimum, and average velocity of the seed according to the drum speed and the time Among the investigated process parameters, it was concluded that the position of the drum in the angle of 45° with the horizontal and drum speed 30m/s and max velocity 2.5m/s minimum velocity of seed 0.4m/s.

V. REFERENCE

- [1] Chidanand, D. V., Shanmuga sundram, S., and Sunil, C. K.2015. some engineering properties of paddy: variety-ADT 46. Trends in Biosciences, 8(15): 3812-3815.
- [2]. Murlidhar, M., and Goswami, T. K. 2012. Effect of moisture content on the physical and textural properties of fenugreek seed. Food, 6(1): 14-21.
- [3]. Ravi, P., and Venkatachalam, T. 2015. Important engineering properties of paddy. Scientific journal agricultural engineering. 4(1): 73-83.
- [4]. ‘Effect of particle shape on bulk particle motion in a seed coater’, M. Pasha, C. Hare, M. Ghadiri, P. M. Piccione, A. Gunadi. *World Congress on Particle Technology*. May 2014, Beijing, China.
- [5]. ‘Analysis of seed processing by the Distinct Element Method’, M. Pasha, C. Hare, M. Ghadiri, P. M. Piccione, S. Taylor. *Powders and Grains Conference*. July 2013, Sydney, Australia.
- [6]. ‘Analysis of seed processing by the Distinct Element Method’, M. Pasha, C. Hare, M. Ghadiri, P. M. Piccione, S. Taylor. *PARTEC 2013 Conference*. April 2013, Nurnberg, Germany.
- [7]. Pandey P, Song Y, Kayihan F, Turton R. Simulation of particle movement in a Pan Coating Device using Discrete Element Modelling and its Comparison with Video-imaging Experiments. *Powder Technol*, 2006;161(2).

[8]. Li J, Wassgren C, Lister JD. Multi-scale Modelling of a Spray coating process in a paddle Mixer/Coater; The Effect of Particle Size Distribution on Particle Segregation and Coating Uniformity, ChemEng Sci. 2013 May;95:203-10.