

ERROR ESTIMATION OF FUNCTION VIA $(C, \beta, \gamma)(E, 1)$ MEANS OF ITS FOURIER-LAGUERRE SERIES

Abstract

In the present work, we proposed the error estimation of function belonging to $L[0, \infty)$ -class by $(C, \beta, \gamma)(E, 1)$ means using its Fourier-Laguerre series at point $t = 0$. Our findings generalize earlier results by Krasniqi, who studied function approximation by $(C, 1)(E, q)$ means, and Sonker, who assessed the degree of approximation by $(C, 2)(E, q)$ means for $q = 1$. We also introduced the error estimation theorem using product summation, along with some graphical interpretations via MATLAB software.

Keywords: Fourier-Laguerre approximation; (C, β, γ) mean; $(E, 1)$ mean; Error estimation

Authors

Neeraj Devi

Department of Mathematics
National Institute of Technology
Kurukshetra,
Haryana 136119, India.
neerajkundu5@gmail.com

Smita Sonker

School of Physical Sciences
Jawaharlal Nehru University
New Delhi- 110067 (India).
smitafma@nitkr.ac.in

I. INTRODUCTION AND MOTIVATION

It is believed that in the last few decades of the nineteenth century, a well-known Weierstrass theorem served as the foundation for approximation theory of functions. Quantifying the errors generated and figuring out how functions can be best approximated by simpler functions are the two main objectives of approximation theory. The field of signal approximation has been studied extensively and has been the interest of academics. Approximation theory is important tool in the field of robotics [1, 2], applied mathematics [3, 4, 5, 6] and operator theory [7, 8]. The theorems of fuzzy numbers and sequence spaces are also covered by summability theory [9]. Product summable operators [10, 11, 12, 13] outperform single summable operators [14, 15, 16]. Numerous mathematicians studying approximation theory and summability were motivated by this finding. In a study on the error estimate of a function via the $(C, 1)(E, q)$ approach, Krasniqi [17] presented a study that made use of the concept of product summable operators. This paper was further improved in 2014 by Sonker [18]. She approximated the series at $t = 0$ by using the $(C, 2)(E, q)$ operator. In response to these findings, the error in the approximation of the same series function was found in 2015 by Mittal and Singh [19] using the (T, Eq) summable approach. Later, in 2016, Khatri and Mishra [20] calculated the error estimation of the Fourier-Laguerre series by using the $H1E1$ product summable operator under appropriate conditions. In 2021, Sharma [21] conducted an investigation into the $(T, C\beta)$ approach of the Fourier-Laguerre series, building on earlier work in the field [22]. This inspired us to estimate a function's error at the frontier point of $t = 0$ using the $(C, \beta, \gamma)(E, 1)$ composite summation method of its Fourier-Laguerre series. Our findings are compared to the results given by Krasniqi [17] and Sonker [18] in order to show the efficiency of proposed summation method. We also introduced the error estimation theorem using product summability along-with some graphical interpretations. Also, using different values of β and γ , the existing summability methods can be derived.

A function $g(t) \in L(0, \infty)$ is expanded by Fourier-Laguerre method as

$$g(t) \equiv \sum_{m=0}^{\infty} c_m L_m^{\delta}(y), \quad (1)$$

Where

$$c_m = \frac{1}{\Gamma(\delta + 1) \binom{m+\delta}{m}} \int_0^{\infty} e^{-y} y^{\delta} g(y) L_m^{\delta}(y) dy, \quad (2)$$

and $L_m^{\delta}(y)$ denotes the m^{th} Laguerre polynomial of order $\delta \geq -1$, defined by generating function

$$\sum_{m=0}^{\infty} L_m^{\delta}(t) w^m = (1 - w)^{-\delta-1} e^{\left(\frac{-tw}{1-w}\right)},$$

and the integral (2) exists. Also,

$$\sigma(y) = \frac{1}{\Gamma(\beta+1)} e^{-y} y^{\beta} [g(y) - g(0)]. \quad (3)$$

Let the sequence $\{s_m(g; t)\}$ be the m^{th} partial sum of the Fourier-Laguerre series (1) given by

$$s_m(g; t) = \sum_{h=0}^m c_h L_h^\delta(t),$$

is also known as Fourier-Laguerre polynomial of degree (or order) $\geq m$.

We denote $C_m^{\beta, \gamma}$ or (C, β, γ) the m^{th} Cesàro mean of order (β, γ) with $\beta + \gamma > -1$ of the sequence $\{s_m(g; t)\}$ i.e.

$$C_m^{\beta, \gamma} = \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma s_h,$$

Where

$$A_m^{\beta+\gamma} = O(m^{\beta+\gamma}), \beta + \gamma > 1 \text{ and } A - 0 - \beta + \gamma = 1.$$

The Fourier-Laguerre series (1) is said to be (C, β, γ) summable to the definite number s if

$$C_m^{\beta, \gamma} = \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma s_h \rightarrow s \text{ as } m \rightarrow \infty.$$

Also, If

$$E_m^1 = \frac{1}{2^m} \sum_{h=0}^m \binom{m}{h} s_h \rightarrow s \text{ as } m \rightarrow \infty,$$

then $s_m(g; y)$ converges to a definite value 's' by E_m^1 means (by Hardy [23]), and we write it as,

$$s_m \rightarrow s(E_m^1).$$

We now introduce the Cesàro-Euler product summability mean of order $(\beta, \gamma, 1)$ as follows.

A. Cesàro -Euler product summability means:

1. The (C, β, γ) transform of the $(E, 1)$ transform defines $(C, \beta, \gamma)(E, 1)$ transform of order $(\beta, \gamma, 1)$ and we shall denote it by $(CE)_m^{1, \beta, \gamma}$. Moreover, if

$$\begin{aligned} t_m^{CE} &= (CE)_m^{q, \beta, \gamma} = \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma E_h^q \\ &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{(2)^h} \sum_{v=0}^h \binom{h}{v} s_v \rightarrow s \text{ as } m \rightarrow \infty. \end{aligned} \quad (4)$$

2. The regularity of (C, β, γ) and $(E, 1)$ methods implies the regularity of $(CE)_m^{1, \beta, \gamma}$ method.

II. USEFUL LEMMAS

The proof of the main theorem, we require following lemmas:

Lemma 1: Given by Szegő (1975, p.177, Theorem 7.6.4) [24], let δ is any real number ε are fixed +ve constant. Then

$$L_m^\delta(t) = O(m^\delta) \text{ if } 0 < t < 1/m, \quad (5)$$

$$= O(t^{-(2\delta+1)/4} m^{(2\delta-1)/4}) \text{ if } 1/m < t < \varepsilon, \text{ as } m \rightarrow \infty. \quad (6)$$

Lemma 2: Given by Szegő (1975, p.177, Theorem 7.6.4) [24], let α and δ be an arbitrary real no., and $0 < \chi < 4$ and $\varepsilon > 0$, then

$$\max e^{-t/2} t^\alpha |L_m^\delta(t)| = O(m^Q)$$

Where

$$Q = \max(\alpha - 1/2, \delta/2 - 1/4), \quad \varepsilon \leq t \leq (4 - \chi)m, \quad (7)$$

$$= \max(\alpha - 1/3, \delta/2 - 1/4), \quad t > m. \quad (8)$$

Lemma 3: Let $\delta > 1$. If $q = 1$, then

$$\frac{1}{2^m} \sum_{h=0}^m \binom{m}{h} h^{(2\delta+1)/4} = O(m^{(2\delta+1)/4}), \quad (9)$$

and if $\beta + \gamma > 1$, then

$$I = \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma (1+h)^\delta = O((1+m)^\delta). \quad (10)$$

Proof: The first result is on similar lines as given by Lenski and Szal [25]. Regarding the latter result, A. Zygmund [26] [7, Vol. I (1.15) and Theorem 1.17] have stated that

$$A_m^{\beta+\gamma} = \binom{m + \beta + \gamma}{m} \equiv O((m+1)^\delta),$$

is positive for $\beta + \gamma > 1$. Moreover, $A_m^{\beta+\gamma}$ is decreasing for $-1 < \beta + \gamma < 0$ and increasing for $\beta + \gamma > 0$. Hence for $\delta < 0$,

$$\begin{aligned} I &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^{[m/2-1]} A_{m-h}^{\beta-1} A_h^\gamma (1+h)^\delta + \frac{1}{A_m^{\beta+\gamma}} \sum_{h=[m/2]}^m A_{m-h}^{\beta-1} A_h^\gamma (1+h)^\delta \\ &= O\left(\frac{(m+1)^{\beta-1} (m+1)^\gamma}{(m+1)^{\beta+\gamma}}\right) \sum_{h=0}^{[m/2-1]} (1+h)^\delta + O((1+m)^\delta) \frac{1}{A_m^{\beta+\gamma}} \sum_{h=[m/2]}^m A_{m-h}^{\beta-1} A_h^\delta \end{aligned}$$

$$\begin{aligned}
 &= O((1+m)^{-1}) \sum_{h=0}^m (1+h)^\delta \int_h^{h+1} dz + O((1+m)^\delta) \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\delta \\
 &= O((1+m)^{-1}) \sum_{h=0}^m \int_h^{h+1} z^\delta dz + O((1+m)^\delta) \\
 &= O((1+m)^{-1}) \int_0^{m+1} z^\delta dz + O((1+m)^\delta) \\
 &= O((1+m)^{-1}) \frac{(m+1)^{\delta+1}}{\delta+1} + O((1+m)^\delta) \\
 &= O((1+m)^\delta)
 \end{aligned}$$

If $\delta > 0$, the outcome is obvious. Our proof is thus finished.

Additional Results

Also, we will use

$$A_m^{\beta+\gamma}(t) = \frac{L_m^{(\beta+\gamma+1)}}{\Gamma(\beta+\gamma+1)},$$

and also using this we can prove $\beta + \gamma > 1$, then

$$\frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma (h^{(2\delta+1)/4}) = O(m^{(2\delta+1)/4}). \quad (11)$$

III. ERROR ESTIMATION THEOREM

Let g be a lebesgue integrable function then the error estimation of g at $t = 0$ by the Cesàro-Euler means of order $(\beta, \gamma, 1)$ with $\beta + \gamma \geq -1$, $q = 1$ of the Fourier-Laguerre series of g is given by

$$|(CE)_m^{1,\beta,\gamma}(g; 0) - g(0)| = o(\tau(m)) \quad (12)$$

with conditions

$$\sigma(x) = \int_0^x |\sigma(y)| dy = o(x^{\delta+1} \tau(1/x)), \quad x \rightarrow 0, \quad (13)$$

$$\int_\epsilon^m e^{y/2} y^{-(2\delta+3)/4} |\sigma(y)| dy = o(m^{(-2\delta+1)/4} \tau(m)), \quad (14)$$

And

$$\int_m^\infty e^{y/2} y^{-1/3} |\sigma(y)| dy = o(\tau(m)), \quad m \rightarrow \infty, \quad (15)$$

where $\tau(x)$ is positive and monotonically increasing signal of x such that $\tau(m) \rightarrow$ as $m \rightarrow \infty$.

Proof of Theorem: Based on the equality

$$L_m^\delta(0) = \binom{m+\delta}{\delta},$$

we obtain

$$\begin{aligned} s_m(0) &= s_m(g; 0) = \sum_{h=0}^m c_h L_h^\delta(0) \\ &= \frac{1}{\Gamma(\delta+1) \binom{m+\delta}{m}} L_m^\delta(0) \int_0^\infty e^{-y} y^\delta g(y) \sum_{h=0}^m L_h^\delta(y) dy \\ &= \frac{1}{\Gamma(\delta+1)} \int_0^\infty e^{-y} y^\delta g(y) L_m^{\delta+1}(y) dy. \end{aligned}$$

Now

$$\begin{aligned} (CE)_m^{1, \beta, \gamma}(g; 0) &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} s_v(0) \\ &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} \frac{1}{\Gamma(\delta+1)} \int_0^\infty e^{-y} y^\delta g(y) L_v^{\delta+1}(y) dy. \end{aligned}$$

Therefore using (3), we have

$$\begin{aligned} |(CE)_m^{1, \beta, \gamma}(g; 0) - g(0)| &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} \int_0^\infty |\sigma(y)| L_v^{\delta+1}(y) dy \\ &= \left(\int_0^{1/m} + \int_{1/m}^\epsilon + \int_\epsilon^m + \int_m^\infty \right) \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \\ &\quad \cdot \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} |\sigma(y)| L_v^{\delta+1}(y) dy \\ &= J_{-1} + J_{-2} + J_{-3} + J_{-4}. \quad (16) \end{aligned}$$

Using orthogonal property (13), Lemma [1][condition 5] and Lemma [3] we get

$$\begin{aligned} J_1 &= \int_0^{1/m} \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} |\sigma(y)| L_v^{\delta+1}(y) dy \\ &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} O(m^{\delta+1}) \int_0^{1/m} |\sigma(y)| dy \\ &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma O(m^{\delta+1}) o(\tau(m)/m^{\delta+1}) \\ &= O(m^{\delta+1}) o(\tau(m)/m^{\delta+1}) \\ &= o(\tau(m)). \end{aligned} \quad (17)$$

Further using the orthogonal property (14), Lemma [1][condition 6], Lemma (3) and using the argument as in Nigam and Sharma [16] and Krasniqi [17] then integrating by parts, we get

$$\begin{aligned}
 J_2 &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} \int_{1/m}^\epsilon |\sigma(y)| L_v^{\delta+1}(y) dy \\
 &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} O(v^{(2\delta+1)/4}) \int_{1/m}^\epsilon |\sigma(y)| y^{-(2\delta+3)/4} dy \\
 &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma O(h^{(2\delta+1)/4}) \int_{1/m}^\epsilon |\sigma(y)| y^{-(2\delta+3)/4} dy \\
 &= O(m^{(2\delta+1)/4}) \int_{1/m}^\epsilon |\sigma(y)| y^{-(2\delta+3)/4} dy = o(\tau(m)). \quad (18)
 \end{aligned}$$

Using (14), Lemma [2][condition 7] and Lemma [3] we get

$$\begin{aligned}
 J_3 &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} \int_\epsilon^m |\sigma(y)| L_v^{\delta+1}(y) dy \\
 &\leq \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} \int_\epsilon^m e^{y/2} y^{-(2\delta+3)/4} |\sigma(y)| e^{-y/2} y^{(2\delta+3)/4} L_v^{\delta+1}(y) dy \\
 &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} O(v^{(2\delta+1)/4}) \int_\epsilon^m e^{y/2} y^{-(2\delta+3)/4} |\sigma(y)| dy \\
 &= O(m^{(2\delta+1)/4}) o(m^{-(2\delta+1)/4} \tau(m)) = o(\tau(m)). \quad (19)
 \end{aligned}$$

Finally, using (15), Lemma [2][condition 7] and Lemma [3], we get

$$\begin{aligned}
 J_4 &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} \int_m^\infty |\sigma(y)| L_v^{\delta+1}(y) dy \\
 &\leq \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} \int_m^\infty e^{y/2} y^{-(3\delta+5)/6} |\sigma(y)| e^{-y/2} y^{(3\delta+5)/6} L_v^{\delta+1}(y) dy \\
 &= \frac{1}{A_m^{\beta+\gamma}} \sum_{h=0}^m A_{m-h}^{\beta-1} A_h^\gamma \frac{1}{2^h} \sum_{v=0}^h \binom{h}{v} O(m^{(\delta+1)/2})
 \end{aligned}$$

$$\int_{\epsilon}^m e^{y/2} \frac{y^{-1/3} |\sigma(y)|}{y^{(\delta+1)/2}} dy$$

$$= O(m^{(\delta+1)/2}) o(m^{-(\delta+1)/2} \tau(m)) = o(\tau(m)). \quad (20)$$

Combining (16), (17), (18), (19) and (20), we get

$$| (CE)_m^{1,\beta,\gamma}(g; 0) - g(0) | = o(\tau(m)).$$

IV. COROLLARY

The novelty of the work is that by using different values of β and γ , the existing summability methods can be derived given as follows:

- If we take $\beta = 1, \gamma = 0$ and $q = 1$, Our findings reduce to the results given by Krasniqi [17] for $q = 1$. If we take $\beta = 2, \gamma = 0$ and $q = 1$, Our findings reduce to the results given by Sonker [18] for $q = 1$.
- If we take $\beta = 0, \gamma = 0$ and $q = 1$, Our findings reduce to the results given by Nigam and Sharma [16] and many others.


V. GRAPHICAL ANALYSIS

Here, we consider the function $g(t) = t^6$, with its Fourier-Laguerre series

$$g(t) = \sum_{m=0}^{\infty} (-1)^m \binom{6}{m} \Gamma(7) L_m^{\beta}(t).$$


Here, $\{c_m\}$ is the coefficient sequence in the Fourier-Laguerre expansion. $(CE)_m^{1,\beta,\gamma}$ is the proposed mean about the point $t = 0$. We are plotting g and $(CE)_m^{1,\beta,\gamma}$ versus Number of terms.

The Fourier-Laguerre series for above function about the point $t = 0$ is plotted in Figure 1 and we can analyze that oscillations can be seen only for very small values about point $t = 0$.

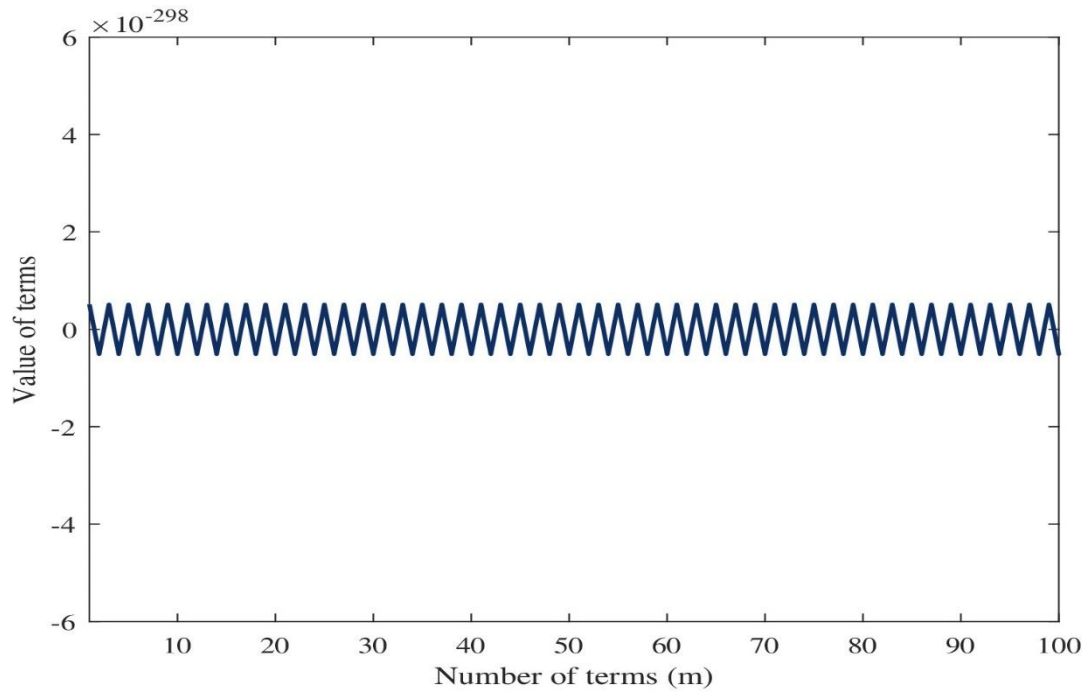


Here, we discuss our results in following cases:

Case 1: When $\beta + \gamma < 0$ and $q = 1$, we interpret that after applying $(CE)_m^{1, \beta, \gamma}$ mean the Fourier-Laguerre polynomial is approximating $g(t)$ from negative side and larger the value of $\beta + \gamma$ better will be the approximation.

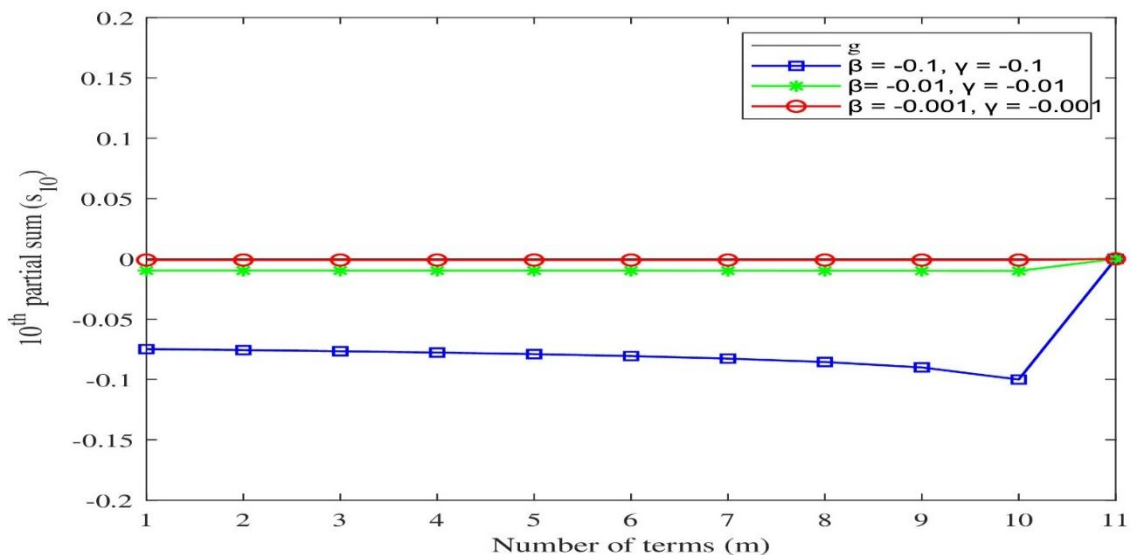


Case 2: When $\beta + \gamma > 0$ and $q = 1$, we interpret that after applying $(CE)_m^{1, \beta, \gamma}$ mean is approximating $g(t)$ from positive side and smaller the value of $\beta + \gamma$ better will be the approximation.

ERROR ESTIMATION OF FUNCTION VIA $(C, \beta, \gamma)(E, 1)$ MEANS OF ITS FOURIER-LAGUERRE SERIES

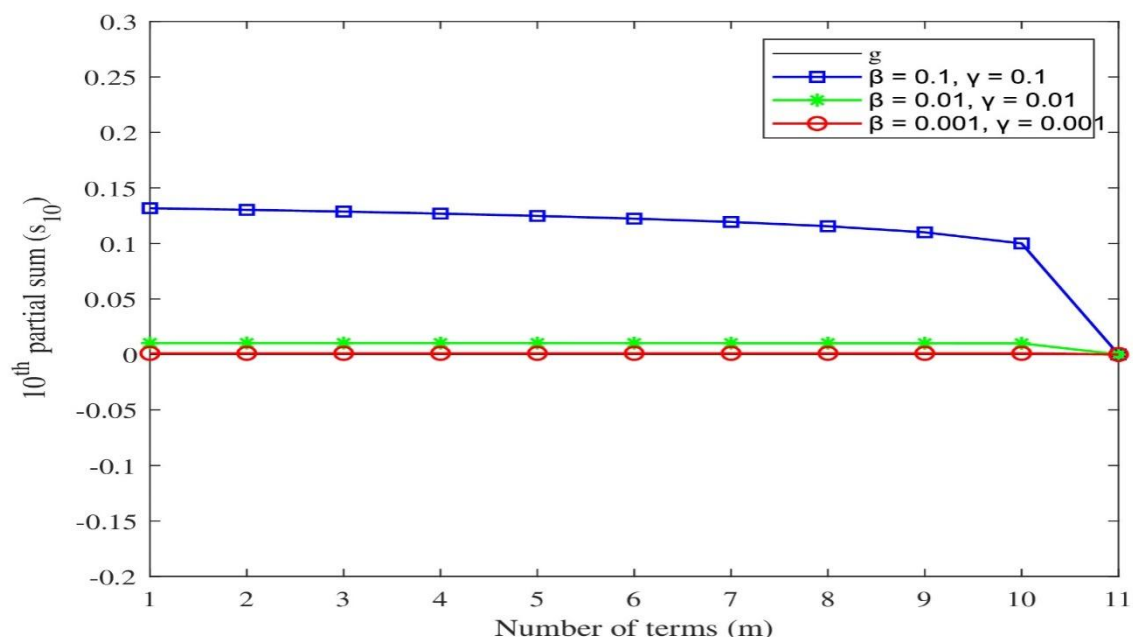

Comparison with Existing Methods: From the graph given below it can be analyzed that the rate of convergence of proposed method is much faster than the existing methods given by Krasniqi[17] and Sonker [18] for $q = 1$.

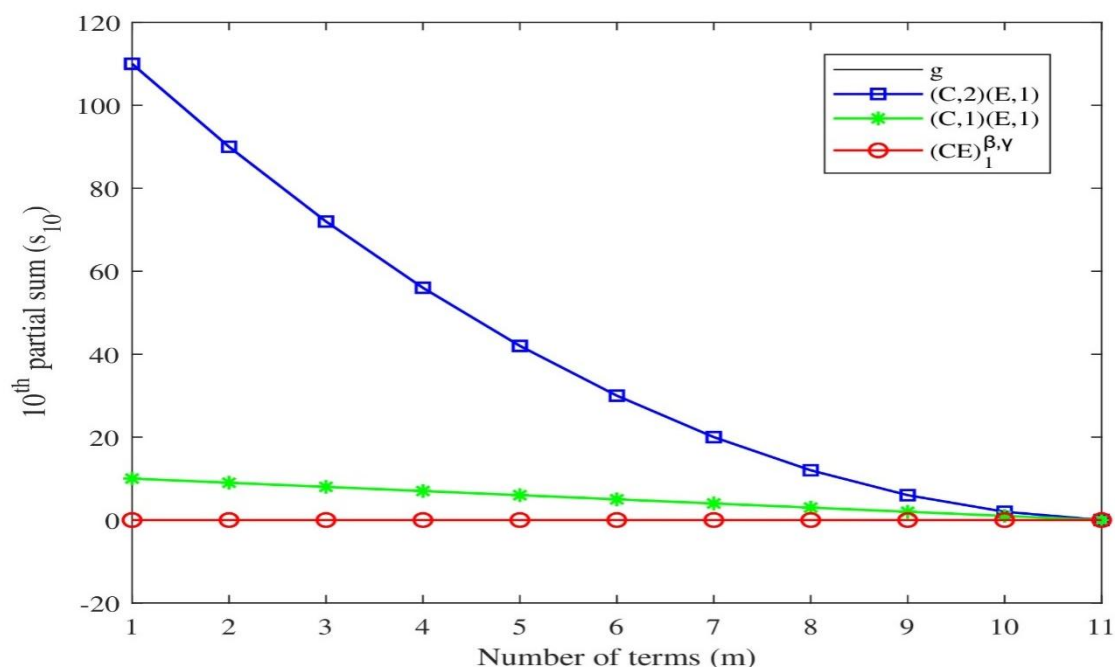

From above graphical interpretation, we can say that $(CE)_m^{1, \beta, \gamma}$ product summability method is much efficient. Also, the change in the value of β and γ changes the behavior of approximation.

VI. CONCLUSION

The use of $(CE)_m^{1, \beta, \gamma}$ product summability of order $(\beta, \gamma, 1)$ generalized the results discussed in corollary and add flexibility to convergence as with the change in values of β, γ changes the behavior of approximation. The rate of convergence is improved with the help of proposed method. Also, using different values of β and γ , the existing summability methods can be derived. We can infer that our result is much efficient and useful.

Conflict of Interest: The authors declare that they have no conflict of interest.

REFERENCES

- [1] K. S. Chaudhary and N. Kumar, "Fractional order fast terminal sliding mode control scheme for tracking control of robot manipulators", ISA Trans., vol. 142, pp. 57-69, 2023.
- [2] K. S. Chaudhary and N. Kumar, "Neural network based fractional order sliding mode tracking control of nonholonomic mobile robots", J. Comput. Anal. Appl., vol. 33, no. 1, pp. 73-89, 2024.
- [3] M. Lalit and A. Prakash, "Stability and numerical analysis of fractional BBM-Burger equation and fractional diffusion-wave equation with Caputo derivative", Opt. Quantum Electron., pp. 1-25, 2024.
- [4] L. Mohan and A. Prakash, "Stability and numerical analysis of the generalised time-fractional Cattaneo model for heat conduction in porous media", Eur. Phys. J. Plus, vol. 294, 2023.
- [5] L. Mohan and A. Prakash, "Analysing the conduction of heat in porous medium via Caputo fractional operator with Sumudu transform", J. Comput. Anal. Appl., vol. 33, no. 1, pp. 1-20, 2024.
- [6] A. Prakash and M. Lalit, "Application of Caputo fractional operator to analyse the fractional model of Brain Tumour via modified technique", Int. J. Comput. Math., vol. 9, pp. 1-33, 2023.
- [7] S. Sonker and Priyanka, "Rate of Convergence of parametrically generalised bivariate Baskakov-Stancu operators", Filomat, vol. 37, no. 27, pp. 9197-9214, 2023.
- [8] S. Sonker and Priyanka, "(C, 1, 1)-Quasinormal Convergence of Double Sequence of Functions, Proc. Int. Conf., MMCITRE 2022", pp. 13-23, 2023.
- [9] E. Yavuz, "Euler summability method of sequences of fuzzy numbers and a Tauberian theorem", J. Intell. Fuzzy Syst., vol. 32, no. 1, pp. 937-943, 2017.
- [10] S. Sonker, and P. Sangwan, "Approximation of Signal Belongs to $W'(L_p, \xi(t))$ Class by Generalized Nörlund-Cesàro Product Means", Proc. SoCTA 2022, vol. 627, no. 2023, pp. 207-218.
- [11] S. Sonker, and R. Jindal, "Approximation of signals by the triple product summability means of the Fourier series", Proc. SoCTA 2021, vol. 425, pp. 169-179, 2022.
- [12] S. Sonker and N. Devi, B. B. Jena, S. K. Paikray, "Approximation and simulation of signals via harmonic Banach summable factors of Fourier series", Math. Methods Appl. Sci., vol. 46, no. 12, pp. 13411-13422, 2023.
- [13] S. Sonker and N. Devi, "Approximation of signals by $(E, 1)(E, 1)$ product summability means of Fourier-Laguerre expansion", Proc. MMCITRE 2022, AISC, vol. 1440, pp. 49-58, 2023.
- [14] A. N. S. Singroura, "On Cesàro Summability of Fourier-Laguerre Series", Proc. Jpn. Acad., vol. 39, no. 4, pp. 208-210, 1963.
- [15] D. P. Gupta, "Degree of approximation by cesaro means of Fourier-Laguerre expansions", Acta Sci. Math., vol. 32, no. (3-4), pp. 255-259, 1971.
- [16] H. K. Nigam, and A. Sharma, "A study on degree of approximation by $(E, 1)$ summability means of the Fourier-Laguerre expansion", Int. J. Math. Math. Sci., no. 1-2, 2010.